




Pendelleuchte | 220-240 V | topLED 7 W 700 mA | CRI 90
8640

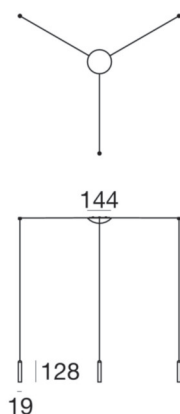

Technische Daten	
Designer	Davide Oppizzi
Installationsposition	Decke
Installationsumgebung	Indoor
Lichtquelle	LED
Optik	Flood
Light emission direction	downward
Lampenleistung	7 W
Lichtstrom (Lichtquelle)	626 lm
Frequency	60 - 50 Hz
Ähnlichste Farbtemperatur / Tonalità	3000 K
Farbwiedergabeindex	90 Ra
Isolierklasse	1
IP	IP20
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
ETL	Nein
Einschließlich Driver	Ja
Leuchte dimmbar	Phase cut
Induzione	Nein
Notbeleuchtung	Nein
Motion sensor	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Nein
Harzbeschichtung	Nein

Oberfläche Gehäuse	
Materiale lega	Aluminium
Farbe	Weiß geprägt RAL 9003
Bearbeitungstyp	Lackierung

Oberfläche Diffusor	
Materiale lega	PC
Farbe	transparent

Oberfläche Fassung	
Materiale lega	Eisen
Farbe	Weiß geprägt RAL 9003
Bearbeitungstyp	Lackierung



Pendelleuchte | 220-240 V | topLED 7 W 700 mA | CRI 90
8640

Single emission pendant luminaires for indoor application. The warm white LED light source with a flood light distribution is composed of 3 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 626 lm, with a 89.4 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of PC; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; The power supply driver is included in the delivery.

The total absorbed power is 7 W.

The device features protection class I and can be ceiling-mounted.

Illuminotechnical Eigenschaften

Lichtstrom (Lichtquelle)	626 lm
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra



Dimmer
PUSH DIM, 220-240V

Code
KIT0026



Dimmer
Bluetooth, 85-240V

Code
KIT0080