

Oberfläche Gehäuse	
Material	Aluminium
Farbe	Weiß geprägtem RAL 9003
Bearbeitungstyp	Lackierung
Oberfläche Diffusor	
Material	PMMA
Bearbeitungstyp	Sandstrahlen





Wandleuchten | 220-240 V | topLED 25 W 700 mA | CRI 90
7777

Single emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 80 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2914 lm, with a 116.6 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of pmma with a sandblasting treatment. The ingress protection degree is IP20; the total weight is of 2.565 kg.

The total absorbed power is 25 W. The power supply cable is included and features.

The device features protection class II and can be wall lights-mounted.

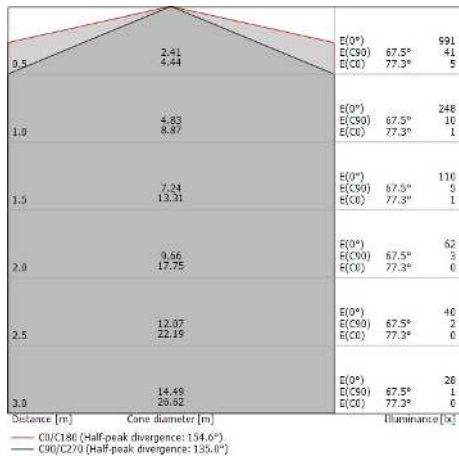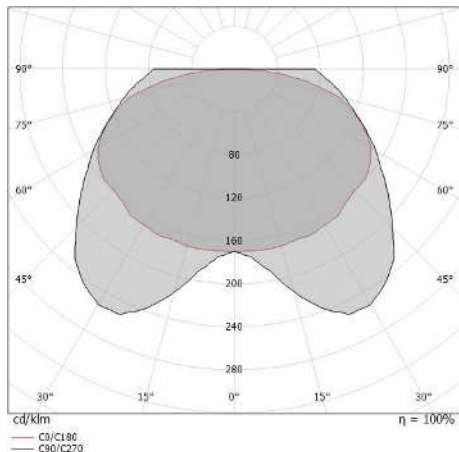

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	50 %
Lichtstrom (Lichtquelle)	2914 lm
Leuchten Lichtstrom	1459 lm
Consumption	25 W
Leuchten Lichtausbeute	58 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Life / Failure Ratio	
L80 B20 C0 80000h	

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 28
UGR axial	< 28

OPTICAL	
Light distribution simmetry	Asymmetrical
Ottica C0/C180	155°
Ottica C90/C270	135°