



MONTAGEANLEITUNG PENDELZUGLEUCHTEN für Seitenzug / Doppelzug

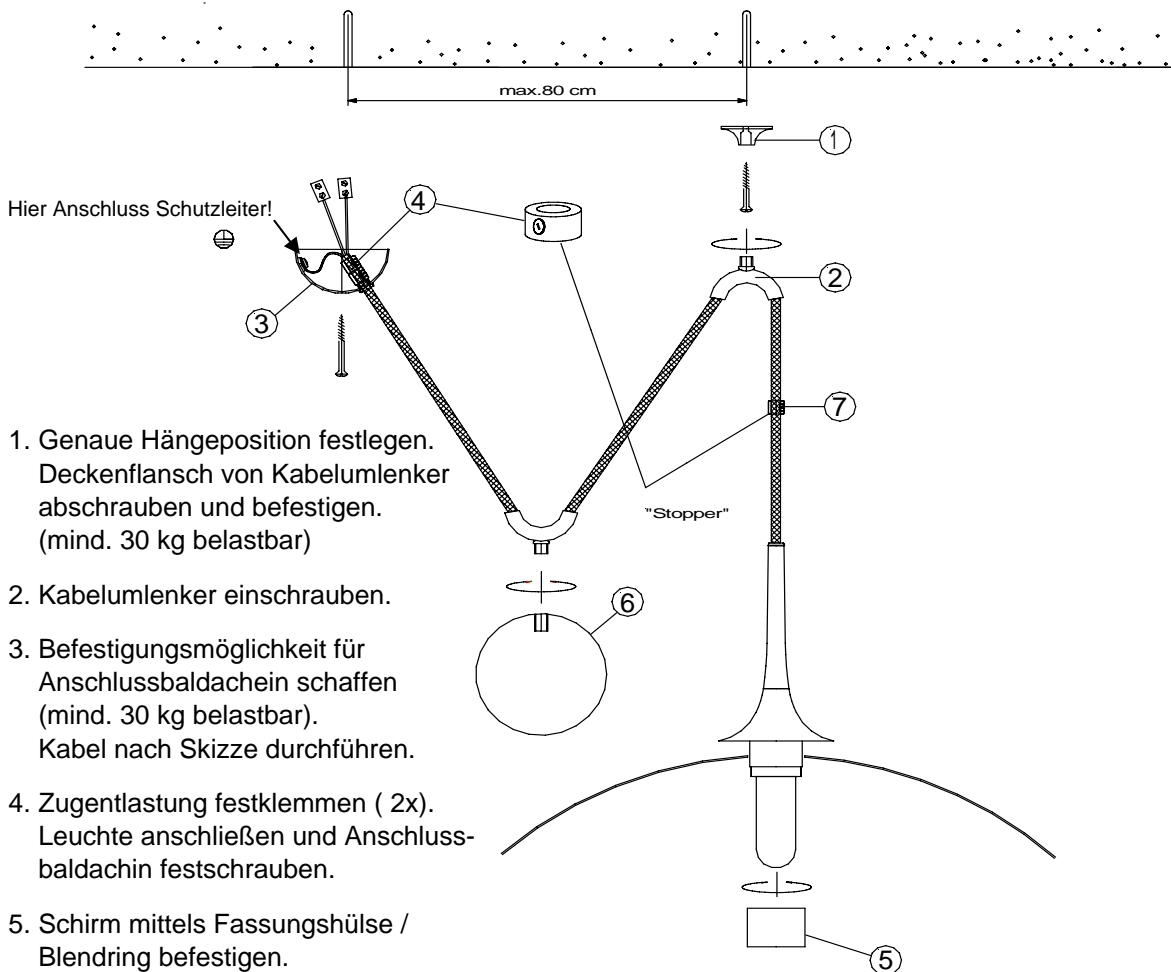

* Es empfiehlt sich, den beiliegenden "Stopper" zu verwenden, wenn der Abstand zwischen Kabelauslass und Hängeposition der Leuchte kleiner als der Schirmdurchmesser ist. In diesem Fall muss der "Stopper" bei Montagebeginn **vor** den anderen Bauteilen aufgefädelt werden.

INSTRUCTIONS FOR MOUNTING AND ASSEMBLING ADJUSTABLE PENDANT LAMPS for side pull / double pull

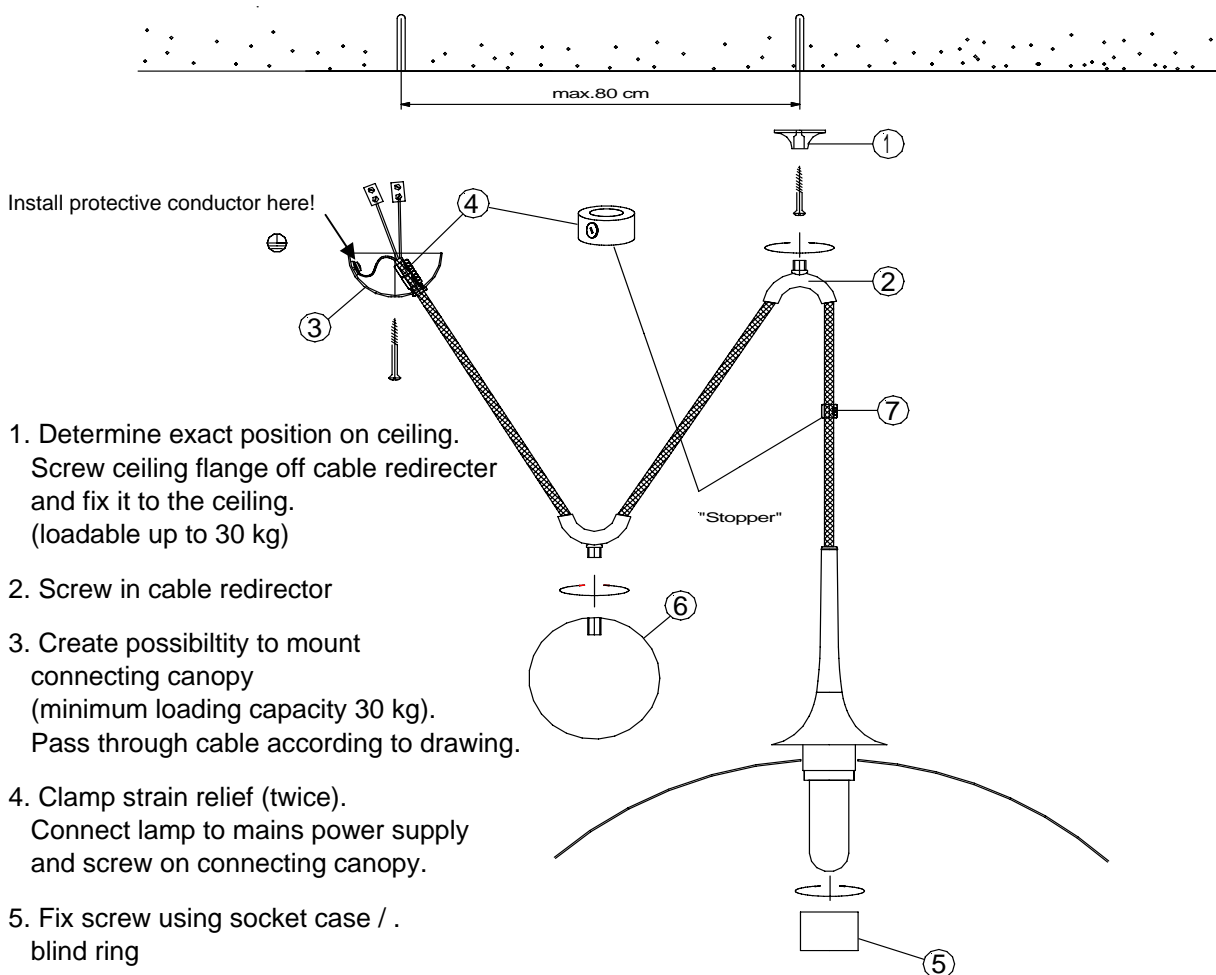

1. Determine exact position on ceiling.
Screw ceiling flange off cable redirecter
and fix it to the ceiling.
(loadable up to 30 kg)
2. Screw in cable redirector
3. Create possibility to mount
connecting canopy
(minimum loading capacity 30 kg).
Pass through cable according to drawing.
4. Clamp strain relief (twice).
Connect lamp to mains power supply
and screw on connecting canopy.
5. Fix screw using socket case / .
blind ring
6. Screw globe weight onto second
cable redirector.
7. Adjust "stopper" in order to
prevent contact between
weight and lamp shade.

* It would be recommendable to use the enclosed "stopper" if distance between cable outlet and hanging position of the lamp is shorter than the diameter of the lampshade.
If so, the "stopper" has to be mounted before the other parts at the start of the assembly.