


Tischleuchten | 220-240 V | topLED 9 W 325 mA | CRI 90
7112

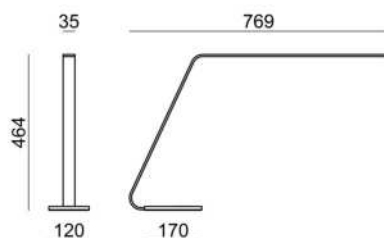

Technische Daten	
Installationsposition	Boden
Installationsumgebung	Indoor
Lichtquelle	LED
Optik	General Lighting
Light emission direction	downward
Lampenleistung	9 W
Lichtstrom (Lichtquelle)	624 lm
Frequency	50 - 60 Hz
Ähnlichste Farbtemperatur / Tonalità	3000 K
Farbwiedergabeindex	90 Ra
AC/DC	AC-DC
Isolierklasse	2
IP	IP20
IP optisches System	IP40
Glühdrahtprüfung	850°
Direkte Montage auf normal entflammaren Oberflächen	Ja
CE	Ja
ETL	Nein
Einschließlich Driver	Ja
Leuchte dimmbar	Touch
Induzione	Nein
Notbeleuchtung	Nein
Motion sensor	Nein
Schwenkbarkeit	Nein
Drehbarkeit	Nein
Begehrbarkeit	Nein
Überrollbarkeit	Nein
Einschließlich Kabel	Ja
Kabellänge	1.60 m
Steckdose	Type C
Harzbeschichtung	Nein
Nettogewicht	2.05 Kg

Oberfläche Gehäuse	
Materiale lega	Aluminium
Farbe	Weiß geprägt RAL 9003
Bearbeitungstyp	Lackierung
Oberfläche Diffusor	
Materiale lega	PC
Farbe	Opal

Tischleuchten | 220-240 V | topLED 9 W 325 mA | CRI 90
7112

Single emission table lamps for indoor application. The warm white LED light source with a general lighting light distribution is composed of 35 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 624 lm, with a 69.3 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of PC. The ingress protection degree is IP20; the total weight is of 2.05 kg. The power supply driver is included in the delivery.

The total absorbed power is 9 W. The power supply cable is included and features.

The device features protection class II and can be floor-mounted.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	59 %
Lichtstrom (Lichtquelle)	624 lm
Leuchten Lichtstrom	371 lm
Consumption	9 W
Leuchten Lichtausbeute	41 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Life / Failure Ratio	
L80B0C20 80000Hrs	

OPTICAL	
Light distribution simmetry	Asymmetrical

Optica C90/C270	111°
-----------------	------

